


600 l/mm @ 1550 nm

VPH transmission grating for spectroscopy & OCT

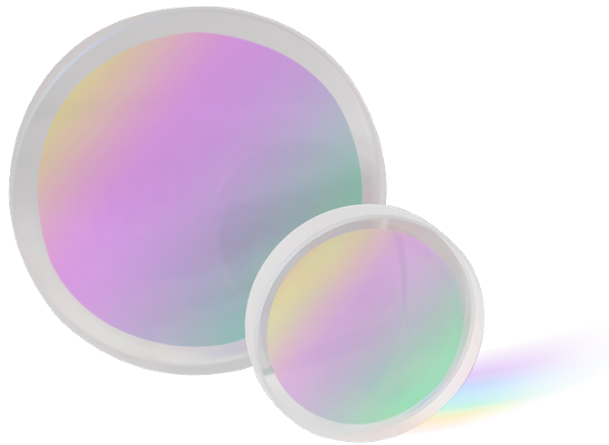

PERFORMANCE BENEFITS

Excellent 1st order diffraction efficiency for greater sensitivity and faster scan rates

Superior uniformity over the full spectral band for better SNR, improved axial resolution in OCT

Minimal polarization sensitivity across wavelength

Low wavefront error, minimal scatter/stray light


Robust, durable optic for easy cleaning & handling

Enables compact, transmissive optical designs

Maximize your sensitivity and scan speed with our patented grating designs

Our VPH gratings are unsurpassed for low light applications like Raman spectroscopy, fluorescence, and optical coherence tomography (OCT), delivering up to 40% more efficiency than surface relief gratings. Our proprietary process encapsulates the grating structure in a robust package, facilitating easy cleaning & handling during system build. We use patented and proprietary optical designs to cover broad bandwidths with low polarization dependence, giving you maximum signal to noise ratio (SNR). Choose from our range of stock gratings, or draw on our expertise to design your ideal grating. Place our VPH gratings at the heart of your spectrometer or system to collect better spectra, faster.

Because light is precious

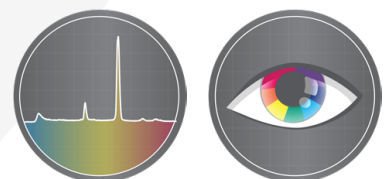


VPH Grating: 600 l/mm @ 1550 nm

STANDARD PRODUCT SPECIFICATIONS & OPTIONS

Standard sizes and specifications for this grating are shown below. Don't see what you need? Let our expert staff design and build a custom grating to meet the needs of your specific application and optical design.

	WP-600/1550-25.4	WP-600/1550-50.8
Center Wavelength (CWL)	1550 nm	
Spatial Frequency (lines/mm)	900 l/mm +/- 0.5 l/mm	
Operating Range	1300 - 1800 nm	
Angle of Incidence (θ_i)	27.7° @ 1550 nm	
AR coating	Optimized for the specified wavelength range & AOI	
Surface Quality	60-40 scratch-dig	
Diffracted Wavefront Error	< $\lambda/5$ rms @ 633 nm over 1" \varnothing	
Substrate	BK7	
Chamfers	0.25-0.75 face width	
Size	$\varnothing=25.4$ mm	$\varnothing=50.8$ mm
Size Tolerance	+0/-0.15 mm	+0/-0.15 mm
Thickness	3 ± 0.25 mm	6 ± 0.25 mm
Clear Aperture	20 mm	45 mm

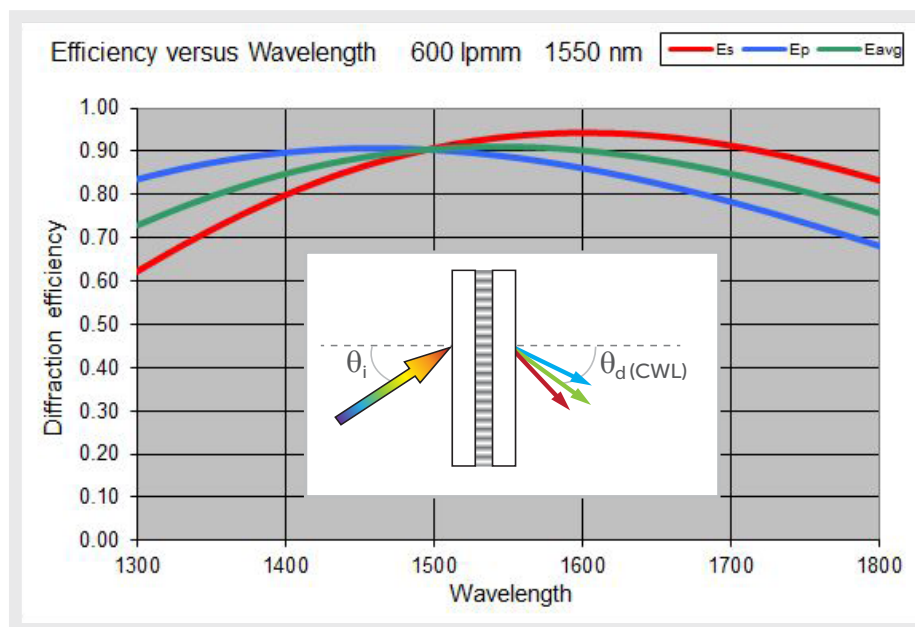

Customization available upon request

WP-PS_600lpm-1550nm_RevA

